


Modifications	Nominal (D)
Dimple_U	∅ 4.8
Dimple_C	∅ 3.0
Notch	60 mm x largeur B
Swage	80 mm x largeur B
Service Hole	HOLE_34 & HOLE_50
Service Hole	HOLE_132 & HOLE_158
Notch	63 mm Chamfer
Lip_Cut	60 mm

Nominal (H)	Nominal (D)	Nominal (L)
40	1.00	15
50	1.20	15
60	1.50	15
	2.00	15
	2.50	15

Nominal (B)	Matériel (D) 1.0 - 1.2	
	Matériel (D) 1.5 - 2.0	
	Swage (B) +0.0 -1.0	Swage (B) +0.0 -1.0
C63	60.0	58.0
C75	72.0	71.0
C89	87.0	85.0
C100	97.0	95.0
C120	117.0	115.0
C150	147.0	145.0
C200	197.0	195.0
C250	247.0	245.0
C300	297.0	295.0
C400	397.0	395.0

Spécificités du profil Easy Housing

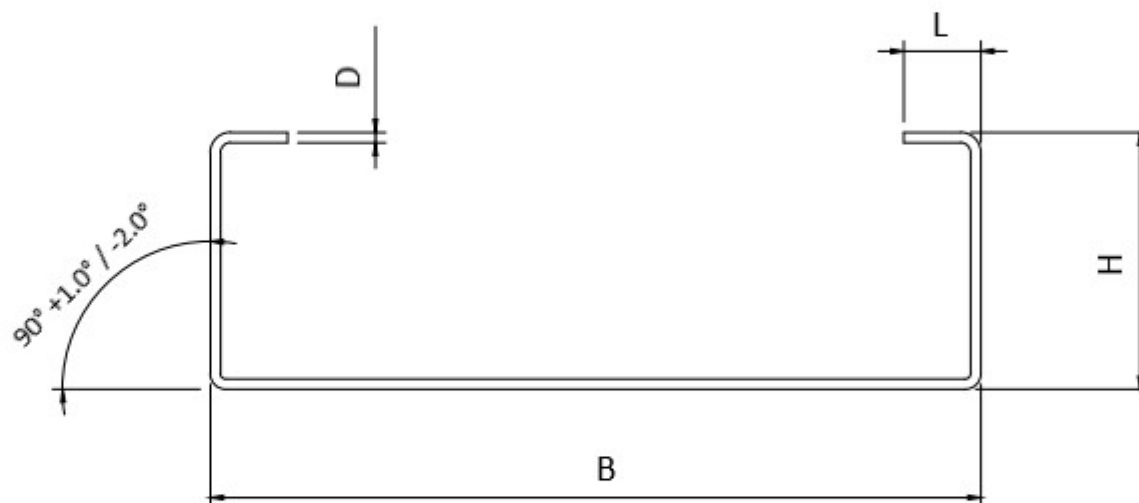

Norme selon EN 1090-2 / Easy Housing

Matériaux - qualité conforme aux spécifications de l'ingénieur concepteur / du client.



SIGNÉ :

MESURE : mm

DATE : 06/09/2021

signe non

ÉCHELLE : 1:1

A3 h

RÉVISION : 04

FILE | Spécificités du profil cadre en acier